

EASY LINE

GLASSWASHERS & DISHWASHERS

The Asber Easy line offers the perfect balance between simplicity, efficiency and excellent wash results. Featuring easy-to-use electromechanical controls, simple plug-and-play installation options and a 2-year parts warranty as standard, the range is perfectly placed as an entry level commercial warewashing solution.

The range is available in a range of configurations and sizes including 350mm, 400mm and 500mm undercounter variants alongside a pass through (hood type) dishwasher.



MAIN FEATURES

- Stainless-steel construction including stainless steel elements, boilers, moving parts and fittings.
- Removable front and base panels, wash tank components and filters for easy maintenance, servicing and configuration.
- Electromechanical controls with a fixed 2 minuite wash cycles.
- Completely automatic operation with built in rinse aid and detergent pumps as standard. Optional drain pumps available.
- Easy to install with 13 Amp plug, waste and water hoses as standard. Easy configuration of multi-voltage power for passthrough versions.
- 2-year parts warranty with national cover as standard. Options to upgrade to include labour warranty on all machines.
- UK Waterboard Regulatory Advisory Service (WRAS) approval for commercial use.



Turning on and cycle selection knob

Machine on Led indicator

Optimal temperature led indicator


Cycle start pushing button



**E**

Glasswasher

350x350mm Basket

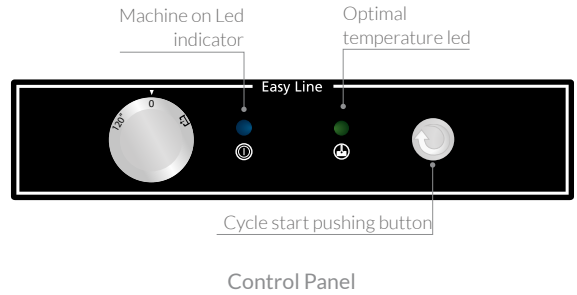**GE-350****GE-350**

- Electromechanical control panel.
- 1 washing cycle of 120".
- Tank capacity: 11 l. / Heating power: 2.0 kw.
- Boiler capacity: 5 l. / Heating power: 2.4 kw.
- Wash pump power: 0.3 kw.
- Rinsing consumption: 2 l/rinse.
- Upper and lower washing and rinsing arms.
- WRAS Approved anti-backflow valve
- Safety thermostat in washing tank and boiler.
- Temperature adjustment: Wash 60 °C and rinse 85 °C.

STANDARD CONFIGURATION

- Detergent & rinse aid dispenser
- 13 Amp UK Plug
- Waste & water hoses for standard UK installation
- 2x 350 x 350mm baskets
- 1x cutlery insert


OPTIONS

- Drain Pump

Model	Reference	Baskets / hour	Door clearance (mm)	Dimensions (mm)	Detergent dispenser	Drain pump	Power (kW)	Voltage (V)
GE350DD	19047936	30	220	430 x 480 x 660	Yes	No	2,65	230V 13A
GE350BDD	19059571	30	220	430 x 480 x 660	Yes	Yes	2,65	230V 13A



GE-400

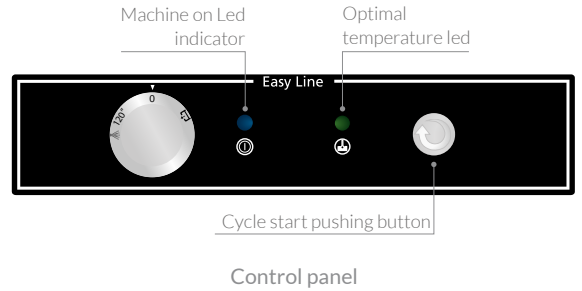

➤ **GE-400**

- Electromechanical control panel.
- 1 washing cycle of 120".
- Tank capacity: 15 l. / Heating power: 2.0 kw.
- Boiler capacity: 5 l. / Heating power: 2.4 kw.
- Wash pump power: 0.3 kw.
- Rinsing consumption: 2.5 l/rinse.
- Upper and lower washing and rinsing arms.
- Independent cycle for cold rinsing.
- WRAS Approved anti-backflow valve
- Safety thermostat in washing tank and boiler.
- Temperature adjustment: Wash 60 °C and rinse 85 °C.

STANDARD CONFIGURATION

- Detergent & rinse aid dispenser
- 13 Amp UK Plug
- Waste & water hoses for standard UK installation
- 2x 400x400mm baskets
- 1x cutlery insert

OPTIONS


- Dishwasher configuration with 400mm plate basket
- Drain pump

Model	Reference	Baskets / hour	Door clearance (mm)	Dimensions (mm)	Detergent dispenser	Drain pump	Power (kW)	Voltage (V)
GE400DD	19047937	30	270	470 x 525 x 720	Yes	No	2.7	230V 13A
GE400BDD	19059573	30	270	470 x 525 x 720	Yes	Yes	2.7	230V 13A

**E**

Glasswasher / Commercial Dishwasher

500x500mm Basket

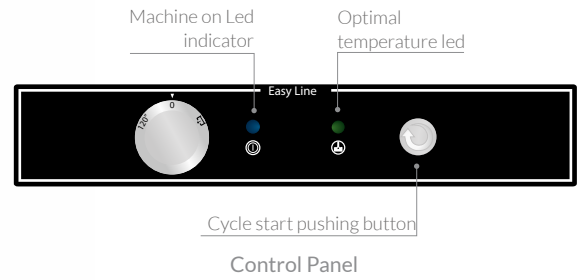**GE-500****Control Panel**

➤ GE-500

- Electromechanical control panel.
- 1 washing cycle of 120".
- Tank capacity: 25 l. / Heating power: 2.0 kw.
- Boiler capacity: 7 l. / Heating power: 2.2 kw.
- Wash pump power: 0.6 kw.
- Rinsing consumption: 2.7 l/rinse.
- Upper and lower washing and rinsing arms.
- Stainless-steel washing arms.
- Built-in rinse aid dispenser.
- WRAS Approved non return valve
- Safety thermostat in washing tank and boiler.
- Temperatures adjusted: Wash 60 °C and rinse 85 °C.

STANDARD CONFIGURATION

- Detergent & rinse aid dispenser
- 13 Amp UK Plug
- Waste & water hoses for standard UK installation
- 2x 500x500mm plate racks
- 1x cutlery insert

OPTIONS

- Glasswasher configuration with 2x 500mm glass racks
- Drain pump


Model	Reference	Baskets / hour	Door clearance (mm)	Dimensions (mm)	Detergent dispenser	Drain pump	Power (kW)	Voltage (V)
GE500DD	19047938	30	320	600 x 600 x 820	Yes	No	2.8 kw	230V 13A
GE500BDD	19055860	30	320	600 x 600 x 820	Yes	Yes	2.8 kw	230V 13A



GE-H500



Lower washing and rinsing arms +
Stainless Steel filters

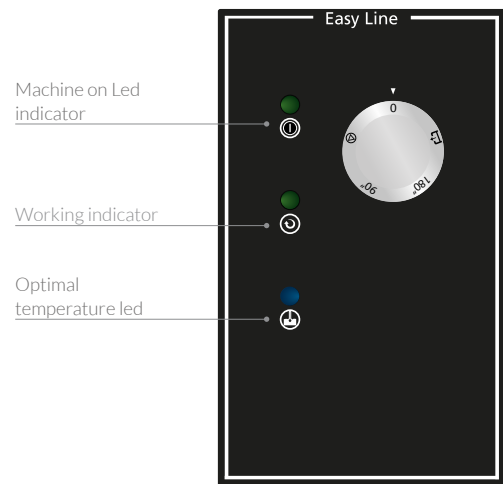

Control Panel



➤ **GE-H500**

- Electromechanical control panel.
- 2 washing cycle of 90° / 180°.
- Continuous cycle up to the manual stop.
- Tank capacity: 45 l. / Heating power: 4.5 kw.
- Boiler capacity: 7 l. / Heating power: 6.0 kw.
- Wash pump power: 0.6 kw.
- Rinsing consumption: 3.0 l/rinse.
- Upper and lower washing and rinsing arms.
- Stainless-steel washing arms.
- Built-in rinse aid dispenser.
- WRAS approved non return valve
- Stainless steel filtering system.
- Safety thermostat in washing tank and boiler.
- Temperature adjustment: Wash 60 °C and rinse 85 °C.

STANDARD CONFIGURATION

- Drain Pump
- Detergent & rinse aid dispenser
- 3 Phase Power (simultaneous boiler/tank heating)
- Waste & water hoses for standard UK installation
- 2x 500x500mm plate racks
- 1x cutlery insert

OPTIONS

- Conversion to 1PH 30A (alternate boiler/tank heating)

Model	Reference	Baskets / hour	Door clearance (mm)	Dimensions (mm)	Detergent dispenser	Drain pump	Power (kW)	Voltage (V)
GEH500BDD	19056118	40	420	675 x 675 x 1420	Yes	Yes	11,1	400V (3 Phase)
GEH500BDD	19056118	40	420	675 x 675 x 1420	Yes	Yes	6,6	230V (1 Phase)



	GE-350	GE-400	GE-500	GE-H500
Electric supply	230V/1N-50Hz	230V/1N-50Hz	230V/1N-50Hz	400V/3N 50Hz
Multivoltage	-	-	-	O
Wash pump Power	300 W	300 W	600 W	600 W
Boiler Heater	2400 W	2400 W	2200 W	6000 W
Tank heater	2000 W	2000 W	2000 W	4500 W
Total Power	2700 W	2700 W	2800 W	11100 W
Multipower	-	-	-	O
Dimensions (mm)				
Width	430	470	600	675
Depth	475	525	600	675
Height	720	750	820	1420
Useful Working height	220	270	320	420
Open hood height	-	-	-	1875
Boiler Capacity	5 L	5 L	7 L	7 L
Tank Capacity	11 L	15 L	25 L	45 L
Washing Temperature	60°C	60°C	60°C	60°C
Rinsing Temperature	85°C	85°C	85°C	85°C
Cycle time	120 s	120 s	120 s	90 / 180 s
Water consumption	2 L/cycle	2.5 L/cycle	2.7 L/Cycle	3 L/Cycle
Inlet water pressure	2 ÷ 4	2 ÷ 4	2 ÷ 4	2 ÷ 4
Water supply hose	3/4"	3/4"	3/4"	3/4"
Net weight	34 kg	39 kg	54 kg	108 kg

**➤ PRWS12 MANUAL SOFTENER**

Manual regeneration required by user
Inlet/outlet connection: 3/4" BSP

**➤ MJR02 AUTOMATIC SOFTENER**

Automatic regeneration based on timer
Inlet Water Temperature: Between 1°C and 30°C
Inlet/outlet connection: 3/4" BSP
13AMP (plug) power connection required

**➤ ADJUSTABLE STANDS**

Q902100
Depth and width can be as small as 390mm
Extends to as long as 640mm.
Legs can be extended as tall as 520mm
Legs can be removed to make even shorter

**➤ SINK FOR UNDERCOUNTERS**

STWD1271RB 1200mm x 700mm
Fully welded stainless steel sink with drainer
For commercial dishwashers up to 600x600mm
Height adjustable legs for up to 850mm clearance
Fully welded splashback of 100 x 15mm
Legs brought forward 60mm for services
Bowl dimensions: 500x500x300mm

➤ ENTRY/EXIT TABLES FOR PASSTHROUGHS

SKU	SIZE	TYPE
DTWL672L	600x700	Entry/Exit Table (Drainer Left)
DTWR672L	600x700	Entry/Exit Table (Drainer Right)
DSTL1072L	1000x700	Entry/Exit Sink (Left)
DSTR1072L	1000x700	Entry/Exit Sink (Right)